




Signature

LOCAL CONNECTIONS

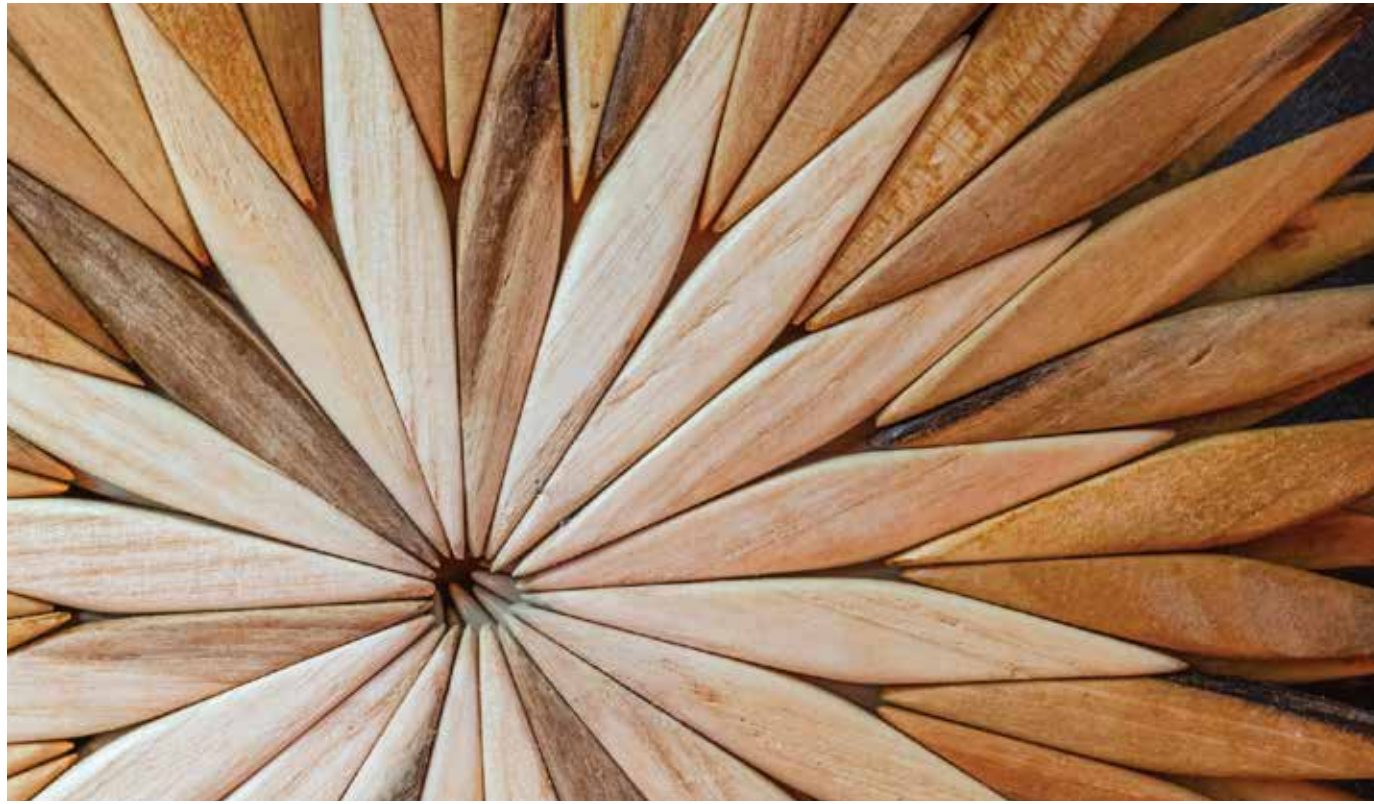

Embracing classics with a hint of modernity, and blending traditional with modern elements.

Local Connections, features exquisite oak patterning that are grounded in classic grain textures. Made in the USA providing the most advanced design capabilities, best quality, excellent service, and reduced transportation costs.

- Stone polymer composite (SPC) construction
- 7.69" x 60" plank size
- 4 colorways featuring realistic visuals with painted bevel edges
- 5.5mm overall thickness with 1.0mm attached underlayment
- Dense and rigid, ultra-durable
- Dimensionally stable with higher indentation resistance
- 100% waterproof core and moisture resistant
- Ease of installation with 3L TripleLock® floating system
- Acoustical benefits, quieter underfoot and floor to floor
- Installs on all levels and over existing hard surface
- Hides subfloor imperfections
- Featuring commercial ceramic urethane for ease of maintenance providing stain, scuff, scratch and wear resistance
- Made in USA 🇺🇸



COVER: LOCAL CONNECTIONS | 2510 WILLOW | CUSTOM RUG | Z54360 | POLISHED COLLECTION

Signature

LOCAL CONNECTIONS | 2910 SPANISH | CUSTOM RUG | HC041 | STAGED COLLECTION

SIGNATUREFLOORING.COM



LOCAL CONNECTIONS | 5710 CHARTER



LOCAL CONNECTIONS | 6710 LIVE OAK



MADE IN THE USA

Signature SPC provides clients with superior quality control, excellent service, faster shipping and products like Local Connections – with no overseas shipping costs or price increase due to tariffs.

- Proprietary design technologies and the most advanced visual capabilities
- Color clarity with the highest levels of embossing and textures provide extreme pattern realism
- Phthalate free
- Dimensionally stable
- Dense and rigid, ultra-durable
- 100% waterproof core and moisture resistant
- Commercial ceramic urethane provides ease of maintenance with stain, scuff, scratch and wear resistance
- 3L TripleLock® floating system for ease of installation
- Acoustical benefits with attached cushion, quieter underfoot and floor to floor
- Significant reduction of freight costs and freight processing
- Excellent product lead times and superior service
- FloorScore® Certified

COLORWAYS


Local Connections is available in 7.69" x 60" plank size.



2510 WILLOW (V3 VARIABILITY)



2910 SPANISH (V3 VARIABILITY)

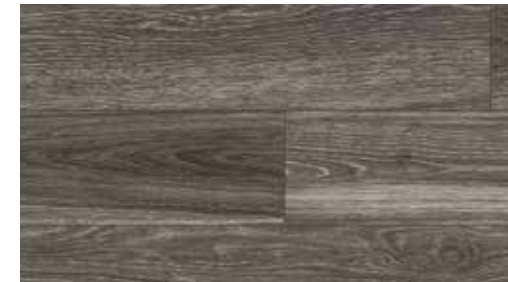

5710 CHARTER (V3 VARIABILITY)



6710 LIVE OAK (V3 VARIABILITY)

Variability (V) indicates the degree of color, shade or pattern variance in a particular style. The rating system is least (V1) to most (V4) varying from piece to piece. Multiple planks may need to be ordered for visual confirmation.

PERFORMANCE CONSTRUCTION

Local Connections SPC features a 20 mil ceramic urethane wear layer offering fade, stain, scratch and wear resistance. Local Connections carries a Limited 10 year Commercial Warranty. Made in the USA.

Wear Layer: 20 mil ceramic urethane wear layer for fade, stain, scratch and wear resistance. Easy maintenance.

Pattern Visual: Realistic Wood Visual.

Composite Core: 100% waterproof. 3L TripleLock® floating system for superior stability and strength.

Enhanced Underlayment: XPO closed cell cushion for advanced sound absorption. Impervious to water. Hides subfloor imperfections.



Note: Installs on all levels and over existing hard surface.



LOCAL CONNECTIONS L5500

SPECIFICATIONS

| | |
|----------------------|---|
| Construction | High Performance Stone Polymer Core SPC |
| Finish | Commercial Ceramic Urethane |
| Wear Layer Thickness | .20 mil (0.50 mm) |
| Overall Thickness | 5.5 mm (includes 1 mm attached cushion) |
| Size | 7.69"W x 60"L |
| Edge Profile | Painted Bevel |
| Texture | Standard Emboss |
| Sq. Foot per carton | 28.84 |
| Sq. Foot per pallet | 1,586.06 |
| Installation Method | 3L TripleLock® System - Floating |

TESTING


| | |
|--------------------------------------|--|
| Classification ASTM F1700 | Class III, Type B, Phthalate Free |
| Slip Resistance ASTM D 2047 | Exceeds Industry Standards |
| Dimensional Stability ASTM F2199 | Passes |
| Size and Squareness ASTM 2055 | Passes |
| Wearlayer Thickness ASTM 410 | Passes |
| Thickness ASTM F386 11 | Passes |
| Flexibility ASTM F137 08 | Passes |
| Residual Indentation ASTM F1914 | Passes |
| Resistance to Heat ASTM F 1514 | Passes |
| Resistance to Light ASTM 1515 | Passes |
| Resistance to Chemicals ASTM F 925 | .5 min = Passes, 24 hr = Passes |
| Radiant Flux ASTM 648 | >0.45 watts/cm ² , NFPA Class I |
| Smoke Density ASTM E 662 | Passes, <450 |
| Impact Insulation Class (IIC Rating) | .56 |

WARRANTY

10 Year Limited Commercial

SUSTAINABILITY

Indoor Air Quality.....FloorScore® Certified

Made in USA 

NOTE: Produced under license of the patents listed at www.i4f.com/patents



Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes

without notice. Such variations do not affect product performance. This product is manufactured and recommended for floor covering use only. Walk off mats are recommended at building entry ways.

For samples, specifications, or other information please contact your sales representative or visit signatureflooring.com

05/2022



2222 S HAMILTON STREET, DALTON, GA 30721 • SIGNATUREFLOORING.COM