



Signature**NOW**

LOCAL STYLE



SAVOR | 1506 TREASURE | PATTERN REPEAT 2'W X 3'L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



ZEAL | 1506 TREASURE | PATTERN REPEAT 2'W X 2'L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



DASH | 1506 TREASURE | PATTERN REPEAT 2'W X 4'L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



VIBE | 1506 TREASURE | PATTERN REPEAT 2'W X 4'L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)





PIAZZ | 4801 ZOOT SUIT | PATTERN REPEAT 7'6"W X 7'6"L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



DAZZLE | 4801 ZOOT SUIT | PATTERN REPEAT 7'6"W X 9'L

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



VIBE | 1506 TREASURE | SHOWN AS BOUND RUG

[SIGNATUREFLOORING.COM/NOW](https://signatureflooring.com/now)



SAVOR | 1506 TREASURE | SHOWN AS SERGED RUG

Signature**NOW** Rugs

- Rugs available in all Local Style patterns and colorways
- Standard 12' sizes include: 2' x 3', 3' x 5', 5' x 7', 6' x 9', 9' x 12'
- Custom sizes are available larger than 12' widths
- Edging options feature coordinated serging yarn colors or standard binding tape
- Non-Skid padding available




DASH | 1506 TREASURE | COORDINATING SOLID COVE BASE SHOWN WITH BINDING TAPE

Signature**NOW** Cove Base

- Cove base is available in seven coordinating solid colorways or use an existing pattern up the wall
- 100% Solution Dyed
- Edging options feature coordinated serging yarn colors or standard binding tape
- 4" Height Standard



1405 CHARMS

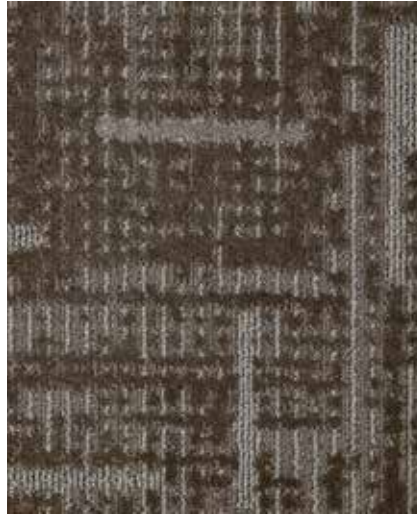

1506 TREASURE



4801 ZOOT SUIT



7509 SPICE



7604 CITY LIGHTS



8202 MAGNETISM



8503 RHYTHM

All Local Style patterns are available in all colors. Colorways above are shown in the style DASH. Rugs and coordinating 4" cove base are available in all patterns and colorways, with solid options available for cove base. Standard binding tape or coordinated serging yarns and non-skid padding are available.

LOCAL STYLE

ROOMS CARPET

SPECIFICATIONS

Styles	Dash B7001, Savor B7002, Vibe B7003, Zeal B7004
Construction	Infinity
Pile Fiber	100% Solution Dyed Nylon
Surface Appearance	Level Patterned Cut & Loop
Gauge	1/10 (39.37 rows per 10 cm)
Stitches per inch	Dash & Savor 14, Vibe 12.1, Zeal 13.3
Pile Height	Dash 0.203", Savor 0.211", Vibe 0.175", Zeal 0.213"
Total Thickness	Dash, Savor, Zeal 0.312", Vibe 0.281"
Tufted Pile Weight	32 oz. (1085 g/m ²)
Dye Method	Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	High Performance SBR latex with attached woven secondary
Density	Dash 5,685, Savor 5,473, Vibe 6,585, Zeal 5,420
Protection	Stain & Soil Release Technology
Width	12'
Pattern Repeat	Dash 2' W x 4'L, Savor 2'W x 3'L, Vibe 2' W x 4'L, Zeal 2'W x 2'L
Adhesive	Signature 2800 Multi-Purpose Latex; Signature 1801 Universal Seam Sealer must be used for all installations where seaming is necessary.

TESTING

Radiant Panel (ASTM E-648)	Class 1
Smoke Density (ASTM E-622)	Less than 450
Methenamine Pill Test (ASTM FF1-70)	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.5 KV

WARRANTY

Limited 10 Year Commercial Wear Warranty

SUSTAINABILITY

Indoor Air Quality	CRI Green Label Plus Certified GLP2121
--------------------------	----------------------------------------

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance.

This carpet is manufactured and recommended for floor covering use only. As in all quality carpet, colors are subject to dye lot variations. For optimum side match and finished seam appearance, this product should be installed whenever possible, with seams running perpendicular to major external (outside) light sources.

The equipment used to manufacture patterned (graphics) carpet may create visible lines in both length and width directions. This

characteristic will not always be detectable in small samples and is not considered a manufacturing defect.

Chair pads are recommended under office chairs with rollers to preserve appearance retention, avoid premature or accelerated wear, and act as a deterrent toward delamination. Special backing systems are available that do not require chair pads. Walk off mats are recommended at building entry ways to reduce soiling.

Recommended adhesive is Signature 2800 Multi Purpose Latex Adhesive and Signature 1801 Universal Seam Sealer. For Warranties to apply, all adhesives and seam sealers must be approved by Signature.



LOCAL STYLE

PUBLIC SPACE CARPET

SPECIFICATIONS

Styles	Allure B7007, Dazzle B7006, Pizazz B7005
Construction	Infinity
Pile Fiber	100% Solution Dyed Nylon
Surface Appearance	Level Patterned Cut & Loop
Gauge	1/10 (39.37 rows per 10 cm)
Stitches per inch	Allure, Dazzle & Pizazz 17
Pile Height	Allure 0.158", Dazzle 0.202", Pizazz 0.211"
Total Thickness	Allure 0.281", Dazzle 0.296", Pizazz 0.312"
Tufted Pile Weight	36 oz. (1022 g/m ²)
Dye Method	Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	High Performance SBR latex with attached woven secondary
Density	Allure 7,300, Dazzle 6,412, Pizazz 6,177
Protection	Stain & Soil Release Technology
Width	15'
Pattern Repeat	Allure 3'9"W x 3'9"L, Dazzle 7'6"W x 9'L, Pizazz 7'6" W x 7'6"L
Adhesive	Signature 2800 Multi-Purpose Latex; Signature 1801 Universal Seam Sealer must be used for all installations where seaming is necessary.

TESTING

Radiant Panel (ASTM E-648)	Class I
Smoke Density (ASTM E-622)	Less than 450
Methenamine Pill Test (ASTM FF1-70)	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.5 KV

WARRANTY

Limited 10 Year Commercial Wear Warranty

SUSTAINABILITY

Indoor Air Quality	CRI Green Label Plus Certified GLP2121
--------------------	----------------------------------------

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance.

This carpet is manufactured and recommended for floor covering use only. As in all quality carpet, colors are subject to dye lot variations. For optimum side match and finished seam appearance, this product should be installed whenever possible, with seams running perpendicular to major external (outside) light sources.

The equipment used to manufacture patterned (graphics) carpet may create visible lines in both length and width directions. This

characteristic will not always be detectable in small samples and is not considered a manufacturing defect.

Chair pads are recommended under office chairs with rollers to preserve appearance retention, avoid premature or accelerated wear, and act as a deterrent toward delamination. Special backing systems are available that do not require chair pads. Walk off mats are recommended at building entry ways to reduce soiling.

Recommended adhesive is Signature 2800 Multi Purpose Latex Adhesive and Signature 1801 Universal Seam Sealer. For Warranties to apply, all adhesives and seam sealers must be approved by Signature.

Signature**NOW**

2222 S HAMILTON STREET, DALTON, GA 30721 • SIGNATUREFLOORING.COM/NOW