

CREATING EXTRAORDINARY SPACES TOGETHER

Signature





## LVT

Guests will enjoy this eye-catching oak pattern grounded in a classic grain texture with lighter highlights throughout the planks. Signature's SPC/LVT features a 20mil ceramic urethane wear layer offering fade, stain, scratch and wear resistance. Available in 7.69" x 60" plank size, proudly made in the USA with excellent design, quality and service with a 15 year commercial warranty.

# LVT G6500

## SPECIFICATIONS

Style Number	G6500
Color	5710
Construction	LVT / SPC
Finish	Ceramic Urethane
Wear Layer Thickness	20 mil (0.5mm) Ceramic Urethane wear layer
Overall Thickness	5.5mm with attached pad 1.0mm XPO
Size	7.69" x 60"
Bevel Type	Painted Bevel
Surface Appearance	Wood Grain
Pieces per carton	9
Sq. Foot per carton	28.84
Sq. Foot per pallet	1,586.06
Installation Method	Floating

## WARRANTY

15 Year Limited Commercial (20 mil)

## TESTING


Classification ASTM F 1700	Class III, Type B (Embossed) Phthalate Free
Slip Resistance ASTM D 2047	Meets the recommended static coefficient of friction for ADA walking surfaces
Dimensional Stability ASTM F 2199	≤0.15
Residual Indentation ASTM F 1914	<8.0%, ≤0.1m
Resistance to Heat ASTM F 1514	Passes
Resistance to Light ASTM 1515	<8.0
Resistance to Chemicals ASTM F 925	Passes
Radiant Flux ASTM 648	Passes
Impact Sound Conduction ASTM 492-09	IIC Rating 57
Sound Transmission Class ASTM E 90-09	STC Rating 53

## SUSTAINABILITY

Indoor Air Quality ..... FloorScore® Certified

## STRUCTURED RUBBER WALL BASE

G6WLB -78A94

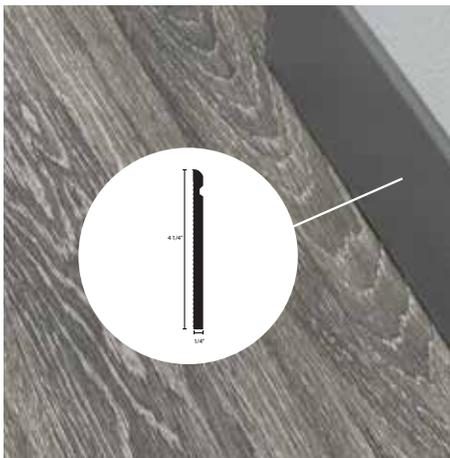

## PRODUCT CONSTRUCTION

Profile	G6WLB-78A94 G6 Wall Base
Nominal Height	4.25" (107.95 mm)
Thickness	0.25" (6.35 mm)
Length	6' Sections (2.44 M)
Carton Quantity	12 pieces per carton, 72 if per carton
Acclimation Time	48 Hours
Storage & Acclimation Temperature	65° - 85° F

## PRODUCT TESTING

Resilient Wall Base - ASTM F1861	Type TP, Group 2, Style D
Critical Radian Flux - ATEM E648	Class I, >0.45 W/cm <sup>2</sup>
Smoke Density - ASTM E662	Passes, <4500.25" (6.35 mm)
Flammability - ASTM E84	Class A

## WARRANTY

10 Year Limited Warranty

## SUSTAINABILITY

LEED® v2009 IEQ Credit 4.1: Qualifies



## CARPET TILE

Architectural details define a floorscape , a linear framework and interlocking patterns create intricate angles and shards across a space for a welcoming guest experience.

**Carpet wall base is available upon request.**

# CARPET TILE G6006

## SPECIFICATIONS

Construction .....	Tufted
Pile Fiber .....	100% Solution Dyed Nylon
Surface Appearance .....	Multi-Level Patterned Loop
Gauge .....	1/10 (39.37 rows per 10 cm)
Stitches Per Inch .....	11 (27.94 per 10 cm)
Pile Height.....	Average 0.125"
Total Thickness .....	Approx. 0.25 (8/32)
Tufted Pile Weight.....	18 oz. per sq. yd. (610 g/m <sup>2</sup> )
Dye Method .....	Solution Dyed
Primary Backing .....	100% Synthetic
Secondary Backing .....	High Performance Vinyl Composite (Non-Ortho Phthalate) Construction
Density .....	5,184
Protection .....	Soil & Stain Release Technology
Size .....	24" x 24" (.6096 m x .6096 m)
Packaging .....	18 tiles per carton, 8 sq. yd. per carton
Installation Method.....	Monolithic, Quarter-Turn, Ashlar Vertical, Ashlar Horizontal
Adhesive .....	Signature 3000 Premium Pressure Sensitive

## TESTING

Radiant Panel (ASTM E 648).....	Class 1 (Direct Glue)
Smoke Chamber (ASTM E 662).....	Less than 450 (Flaming Mode)
Methenamine Pill Test (ASTM D 2859) .....	Passes
Dimensional Stability (AACHEN Test).....	Passes
Electrostatic Propensity (AATCC 134).....	Less than 3.0 KV

## WARRANTIES

Limited Lifetime Carpet Tile Warranty including: Wear, Delamination, Tuft Bind, Edge Ravel and Static Protection

## SUSTAINABILITY

Indoor Air Quality.....	CRI Green Label Plus Certified GLP100143
Made in the USA	

---

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance. This carpet is manufactured and recommended for floor covering use only. As in all quality carpet, colors are subject to dye lot variations. These patterns contain inherent characteristics, which may result in pattern run off, and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Not all patterns and colors may be aesthetically acceptable with certain installation methods. Signature cannot be responsible for seam aesthetics if the installation method deviates from the recommended layout for that style. Chair pads are recommended under office chairs with rollers to preserve appearance retention, avoid premature or accelerated wear, and act as a deterrent toward delamination. Special backing systems are available that do not require chair pads. Walk off mats are recommended at building entry ways to reduce soiling. For Warranties to apply, all adhesives and seam sealers must be approved by Signature.

---

For samples, specifications, or other information please contact your sales representative or visit [signatureflooring.com](http://signatureflooring.com)

For more information or to place an order, please contact us at  
800-809-7086 (ext. 5108) or [info@signatureflooring.com](mailto:info@signatureflooring.com).