





Signature

LANAI

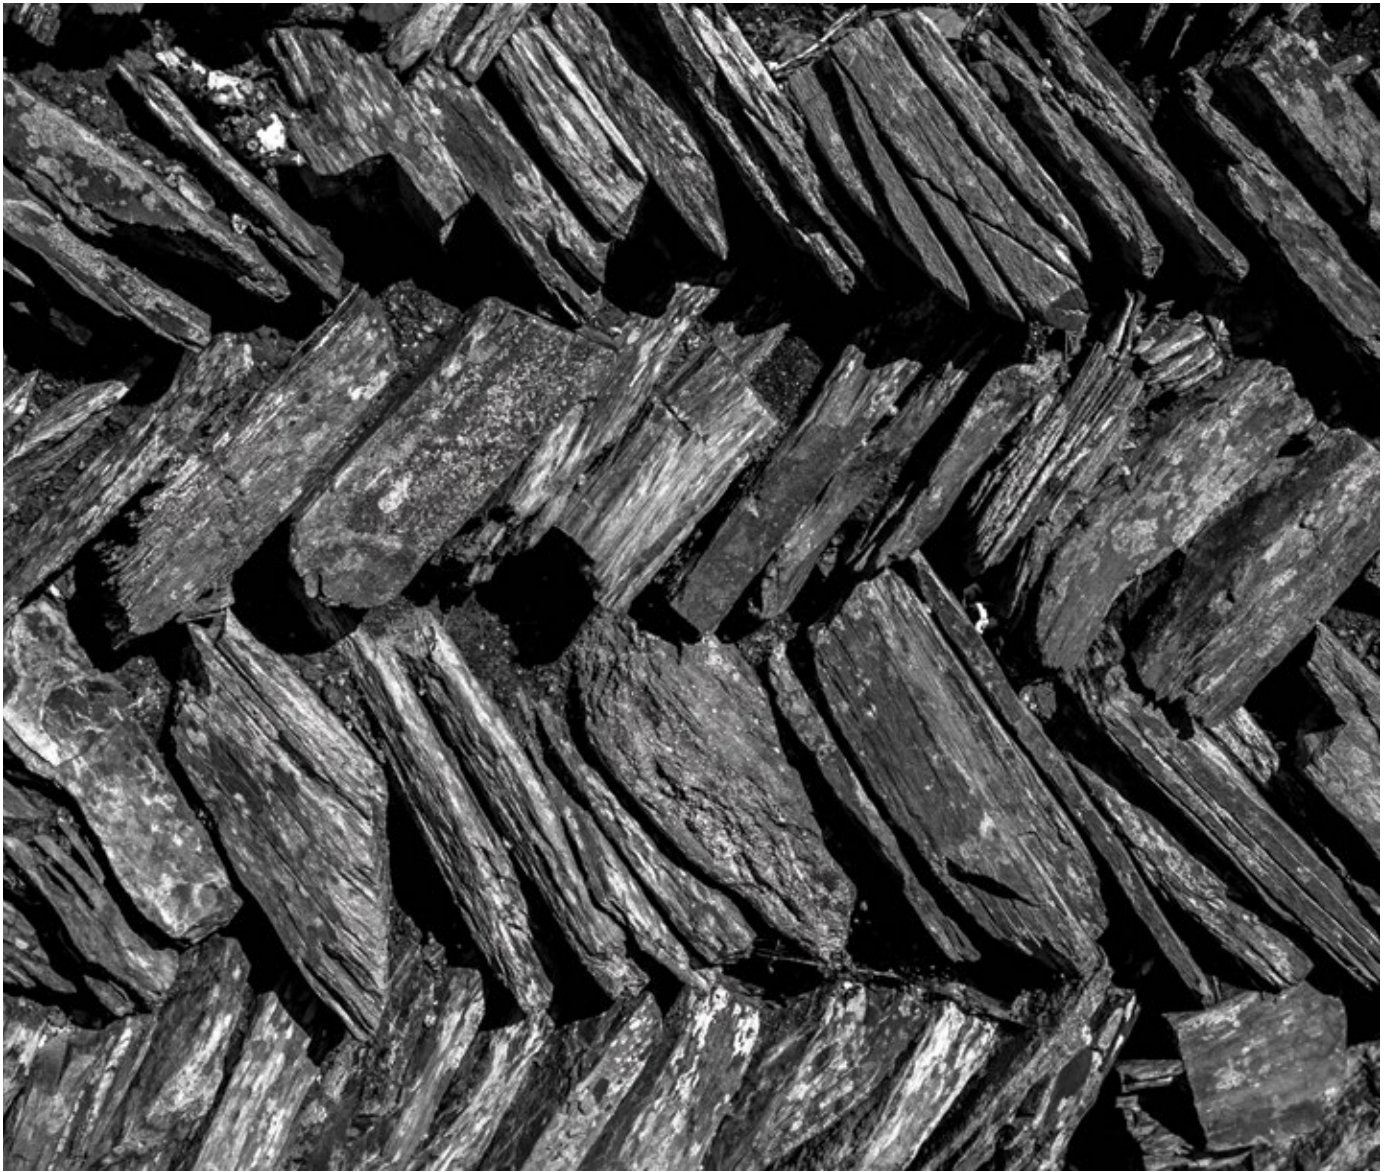

Capturing a playful spirit with a contemporary edge, Lanai features a refreshing take on a herringbone.

The loose herringbone pattern in an accent color brings fresh yet sophisticated structure to the field of subtle, organic movement. Lanai's construction keeps the visual refined through incredible definition of texture.





COVER: LANAI OCEANIC  
LANAI SOLARIUM



# LANAI

Construction	Tufted
Pile Fiber	100% Solution Dyed Nylon
Stitches per inch	15.6
Pile Height Average	0.179
Total Thickness	0.343 average
Tufted Face Weight	32 oz.
Dye Method	Solution
Primary Backing	Woven Polypropylene
Secondary Backing	High Performance SBR latex with attached woven secondary
Width	12'
Pattern Repeat	24" W x 24" L
Gauge	1/10
Density Factor	6,131
Weight Density Factor	220,708
Protection	Stain & Soil Release Technology
CRI Certification	GLP 2121
Flooring Radiant Panel ASTM E-648	Class I
Methenamine Pill Test FF1-70	Passes
Static Propensity AATCC 134	Less than 3.5 KV
Smoke Density E-622	Less than 450
Warranty	Ten Year Limited Wear

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance.

This carpet is manufactured and recommended for floor covering use only. As in all quality carpet, colors are subject to dye lot variations. For optimum side match and finished seam appearance, this product should be installed whenever possible, with seams running perpendicular to major external (outside) light sources.

The equipment used to manufacture patterned (graphics) carpet may create visible lines in both length and width directions. This

characteristic will not always be detectable in small samples and is not considered a manufacturing defect.

Chair pads are recommended under office chairs with rollers to preserve appearance retention, avoid premature or accelerated wear, and act as a deterrent toward delamination. Special backing systems are available that do not require chair pads. Walk off mats are recommended at building entry ways to reduce soiling.

Recommended adhesive is Signature 2800 Multi Purpose Latex Adhesive and Signature 1801 Universal Seam Sealer. For Warranties to apply, all adhesives and seam sealers must be approved by Signature.

For samples, specifications, or other information please contact your sales representative or visit [signatureflooring.com](http://signatureflooring.com)

4/2018

 Signature

2222 S HAMILTON STREET, DALTON, GA 30721 • [SIGNATUREFLOORING.COM](http://SIGNATUREFLOORING.COM)