






Signature

MINGLE



With layer upon layer of crosshatching, Mingle builds richly dimensional yet understated texture, bringing refinement and warmth to modern spaces.

Mingle's soft geometric design plays particularly well with organic visuals. The multi-layered pattern creates crisp definition and unique complexity.

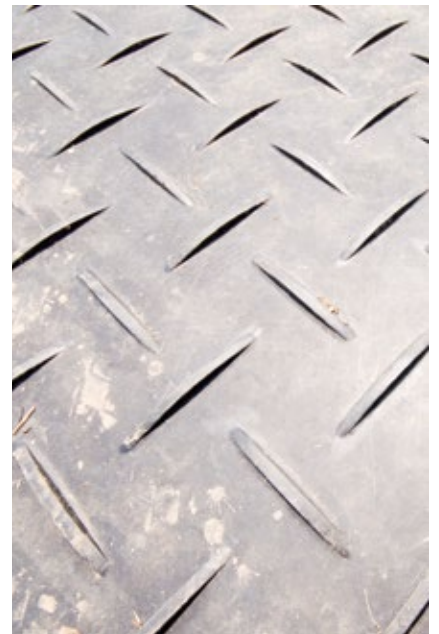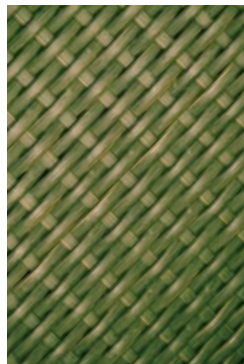



COVER: MINGLE ORGANIC
MINGLE ORGANIC



MINGLE

Construction	Tufted
Pile Fiber	100% Solution Dyed Nylon
Stitches per inch.....	13.3
Pile Height Average	0.179
Total Thickness	0.343 average
Tufted Face Weight	32 oz.
Dye Method	Solution
Primary Backing	Woven Polypropylene
Secondary Backing	High Performance SBR latex with attached woven secondary
Width	12'
Pattern Repeat	24" W x 24" L
Gauge	1/10
Density Factor	6,428
Weight Density Factor	231,405
Protection	Stain & Soil Release Technology
CRI Certification	GLP 2121
Flooring Radiant Panel ASTM E-648	Class I
Methenamine Pill Test FF1-70	Passes
Static Propensity AATCC 134	Less than 3.5 KV
Smoke Density E-622	Less than 450
Warranty.....	Ten Year Limited Wear

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance.

This carpet is manufactured and recommended for floor covering use only. As in all quality carpet, colors are subject to dye lot variations. For optimum side match and finished seam appearance, this product should be installed whenever possible, with seams running perpendicular to major external (outside) light sources.

The equipment used to manufacture patterned (graphics) carpet may create visible lines in both length and width directions. This

characteristic will not always be detectable in small samples and is not considered a manufacturing defect.

Chair pads are recommended under office chairs with rollers to preserve appearance retention, avoid premature or accelerated wear, and act as a deterrent toward delamination. Special backing systems are available that do not require chair pads. Walk off mats are recommended at building entry ways to reduce soiling.

Recommended adhesive is Signature 2800 Multi Purpose Latex Adhesive and Signature 1801 Universal Seam Sealer. For Warranties to apply, all adhesives and seam sealers must be approved by Signature.

For samples, specifications, or other information please contact your sales representative or visit signatureflooring.com

4/2018



2222 S HAMILTON STREET, DALTON, GA 30721 • SIGNATUREFLOORING.COM