



Signature

NOTABLE



Distinguishable in all types of spaces, Notable provides an array of wood visuals in stunning colorations and textures, all offered in 6" x 48" planks.

Colors include warm and cool gray tones as well as rich, deep browns and bleached woods. As functional as it is beautiful, Notable is waterproof and features a tough composite core and attached cushion.

- Random color variations within each carton allows for unique flooring design
- Waterproof composite core with commercial wear layer
- Fade, stain, scratch, and dent resistance
- Uniclic locking system for superior stability and strength
- Attached cushion provides advanced sound absorption
- Hides subfloor imperfections





COVER: **NOTABLE** MOUNTAIN ASH + **LANAI** SALTWATER
NOTABLE RED CEDAR



NOTALABLE ASH

NOTABLE

Construction	High Performance Waterproof Composite Core WPC Phthalate Free
Finish	Commercial Urethane with Double UV Coating
Wear Layer Thickness	20 mil (0.50 mm)
Overall Thickness	8 mm (includes 1.5 mm attached cushion)
Installation Method	Uniclic® Locking System - Floating
Size	6"W x 48"L
Bevel	Micro Bevel
Texture	Standard Emboss
Sq. Foot per carton	15.76
Sq. Foot per pallet	1229.28
Impact Sound Conduction ASTM E492-09	IIC 62
Slip Resistance ASTM D 2047	>0.7 Dry
Dimensional Stability ASTM F2199	Passes, Less than 0.020"/ft.
Residual Indentation ASTM F1914	Passes
Flexibility ASTM F 137	Passes, 50mm Mandrel
Resistance to Heat ASTM F 1514	Passes
Resistance to Light ASTM 1515	Passes
Resistance to Chemicals ASTM F 925	5 min = Passes, 24 hr = Passes
Radiant Flux ASTM 648	>0.45 watts/cm2, NFPA Class I
Smoke Density ASTM E 662	Passes, <450
Indoor Air Quality	FloorScore Certified
Warranty	10 Year Limited Light Commercial

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes

without notice. Such variations do not affect product performance. This product is manufactured and recommended for floor covering use only. Walk off mats are recommended at building entry ways

For samples, specifications, or other information please contact your sales representative or visit signatureflooring.com


4/2018

Wear layer: 20 mil commercial urethane with double UV coating for fade, stain and scratch and resistance. Easy maintenance.

Pattern Visual: Realistic wood visual.

Composite Core: 100% waterproof. Uniclic® locking system for superior stability and strength.

Enhanced Underlayment: IXPE closed cell cushion for advanced sound absorption. Impervious to water. Hides subfloor imperfections.

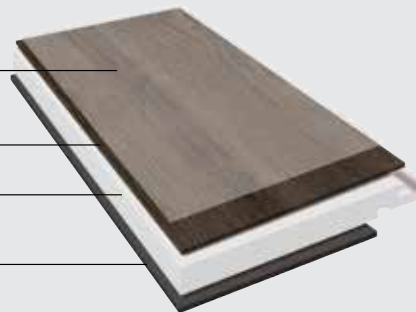

 **Signature**

2222 S HAMILTON STREET, DALTON, GA 30721 • SIGNATUREFLOORING.COM