



Signature

URBAN ESCAPES  
LOOSE LAY OR SPC LVT





Clean, subdued and refined graining, lays the groundwork for Urban Escapes, LVT, featuring visual sophistication with minimal design.

Urban Escapes Biophilic design principles, allows for a connection with nature, creating a sense of warmth, beauty and well-being; and an enjoyment to the spaces we work, live and play.

- Available in two constructions; loose lay with non-skid backing or Stone Polymer Core (SPC)
- Each available in 7" x 48" plank size with micro bevel edge
- Superior durability with 5mm overall thickness and 20 mil commercial urethane wear layer with loose lay offering ceramic bead and SPC polyurethane finish
- Water, stain, scratch and scuff resistant
- Inherit thickness promotes acoustical benefits and comfort underfoot
- Twice as thick as traditional LVT for seamless transition to Signature's carpet tile
- Low maintenance
- Immediate occupancy



COVER: URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 173 JUNEAU



URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 402 AUSTIN | FASHION PLANE CARPET TILE | 4515 WATER | 24" X 24" OR 12" X 48"









URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 173 JUNEAU | LIVING SKETCHES BROADLOOM | HC138



URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 855 MEMPHIS





URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 721 NASHVILLE | EMERGE COLLECTION CARPET TILE | CT0121 | 24" X 24"

URBAN ESCAPES (L1009 LOOSE LAY OR L1011 SPC) | 776 SAVANNAH | 721 NASHVILLE



COLORWAYS

Urban Escapes is available in 7" x 48" plank size.



L1009 LOOSE LAY V2  
L1011 SPC 173 JUNEAU



L1009 LOOSE LAY V2  
L1011 SPC 402 AUSTIN



L1009 LOOSE LAY V2  
L1011 SPC 714 SEATTLE



L1009 LOOSE LAY V2  
L1011 SPC 721 NASHVILLE



L1009 LOOSE LAY V2  
L1011 SPC 776 SAVANNAH




L1009 LOOSE LAY V2  
L1011 SPC 855 MEMPHIS

Variability (V) indicates the degree of color, shade or pattern variance in a particular style. The rating system is least (V1) to most (V4) varying from piece to piece. Multiple planks may need to be ordered for visual confirmation. Urban Escapes is a (V2) variability.


PERFORMANCE CONSTRUCTION

Urban Escapes Loose Lay LVT features a 20 mil ceramic urethane wear layer offering pattern clarity, fade, stain and wear resistance. Urban Escapes carries a Limited 10 year Commercial Warranty.

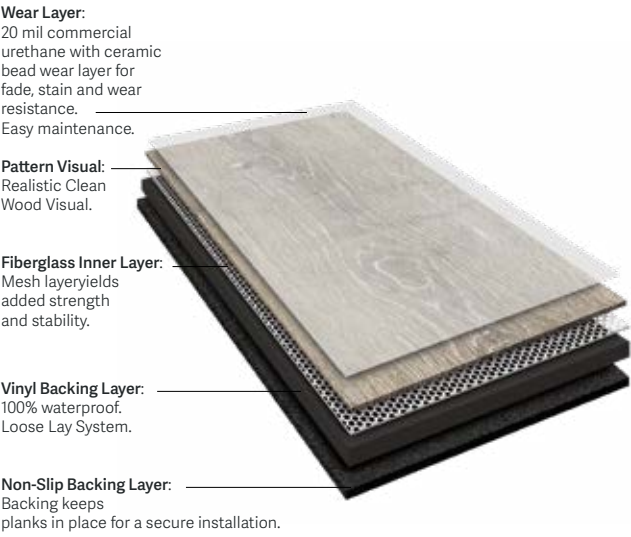

**Note:** Loose lay with perimeter glue or install with full spread adhesive.

Urban Escapes SPC features a 20 mil commercial urethane wear layer offering fade, stain, scratch and wear resistance. Urban Escapes carries a Limited 10 year Commercial Warranty. Made in the USA.

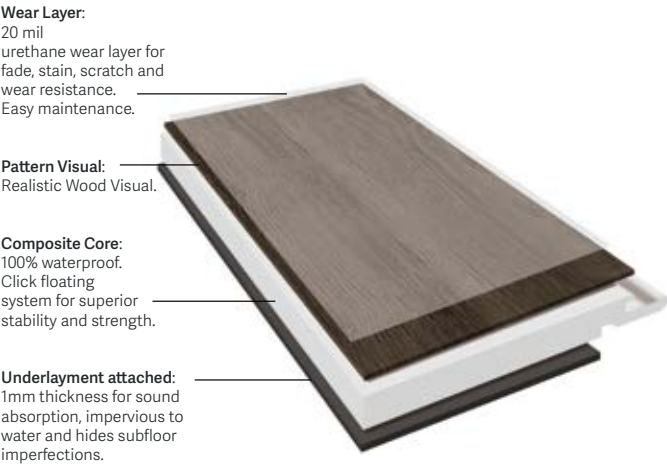

**Note:** Installs on all levels and over existing hard surface.

URBAN ESCAPES

L1009 LOOSE LAY

L1011 SPC

SPECIFICATIONS

Construction	LVT Plank	Stone Polymer Core (SPC)
Finish	Commercial Urethane with Ceramic Bead Finish	Commercial Urethane with Polyurethane Finish
Wear Layer Thickness	20 mil (0.50 mm)	20 mil (0.50 mm)
Overall Thickness	.5 mm	5 mm with 1mm attached underlayment
Size	7"W x 48"L	7"W x 48"L
Edge Profile	Micro Bevel	Micro Bevel
Pieces per carton	8	10
Sq. Foot per carton	18.67 sf	23.64 sf
Cartons per pallet	55	65
Sq. Foot per pallet	1,026.85	1,536.6
Installation Method	Loose lay with perimeter glue or with full spread adhesive	Click Floating System
Adhesive	Signature 3000 Premium Pressure Sensitive Adhesive (PSA)*	No adhesive required

TESTING

Classification ASTM F1700	Class III, Type B, Phthalate Free	Class III, Type B, Phthalate Free
Slip Resistance ASTM D 2047	Exceeds Industry Standards	Exceeds Industry Standards
Dimensional Stability ASTM F2199	Passes	Passes
Size and Squareness ASTM 2055	Passes	Passes
Wearlayer Thickness ASTM 410	Passes	Passes
Thickness ASTM F386 11	Passes	Passes
Flexibility ASTM F137 08	Passes	Passes
Short Term Residual Indentation ASTM F1914	Passes	Passes
Long Term Residual Indentation ASTM F970.	Passes	Passes, Max loading: 250 lb per sq inch
Resistance to Heat ASTM F 1514	Passes	Passes
Resistance to Light ASTM 1515	Passes	Passes
Resistance to Chemicals ASTM F 925	Passes	Passes
Radiant Flux ASTM 648.	Passes, meets or exceeds Class I	Passes, meets or exceeds Class I
Smoke Density ASTM E 662	Passes, <450	Passes, <450
Impact Insulation Class (IIC Rating)	54 - 6" slab, no ceiling	72 - 6" slab, drop ceiling
Sound Transmission Class (STC).	53	71

WARRANTY 10 Year Limited Commercial 10 Year Limited Commercial

SUSTAINABILITY

Indoor Air Quality FloorScore® Certified FloorScore® Certified

\* **NOTE/Loose Lay:** For areas with lengths and/or widths longer than 20' the perimeter of the room requires a minimum of a 4" strip of PSA on the perimeter of the subfloor and at 20' distances parallel to the perimeter forming a grid. For commercial high traffic or rolling load areas we recommend Signature 3000 (PSA) adhesive - full glue down method.

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Such variations do not affect product performance. This product is manufactured and recommended for floor covering use only. Walk off mats are recommended at building entry ways.

For samples, specifications, or other information please contact your sales representative or visit signatureflooring.com

01/2023





2222 S HAMILTON STREET, DALTON, GA 30721 • SIGNATUREFLOORING.COM